(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 30 September 2004 (30.09.2004)

PCT

(10) International Publication Number WO 2004/083546 A1

(51) International Patent Classification7:

E04B 2/96

(21) International Application Number:

PCT/IB2004/000754

(22) International Filing Date: 16 March 2004 (16.03.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: UD2003A000058

17 March 2003 (17.03.2003)

(71) Applicant (for all designated States except US): AL-PROGETTI SRL [IT/IT]; Via Ressel, 5, F-34018 SAN DORLIGO DELLA VALLE (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): FERRO, Nicolò [IT/IT]; Via Campo Marzio, 4, I-34100 TRIESTE (IT).

(74) Agent: PETRAZ, Gilberto; GLP Srl, Piazzale Cavedalis, 6/2, I-33100 Udine (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CII, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD. MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EH, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD TO ASSEMBLE CURTAIN WALLS AND CURTAIN WALL ADOPTING THE METHOD

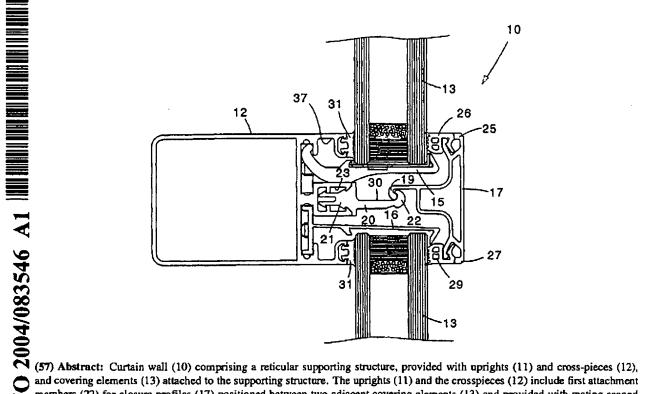

and covering elements (13) attached to the supporting structure. The uprights (11) and the crosspieces (12) include first attachment members (22) for closure profiles (17) positioned between two adjacent covering elements (13) and provided with mating second attachment members (19).